
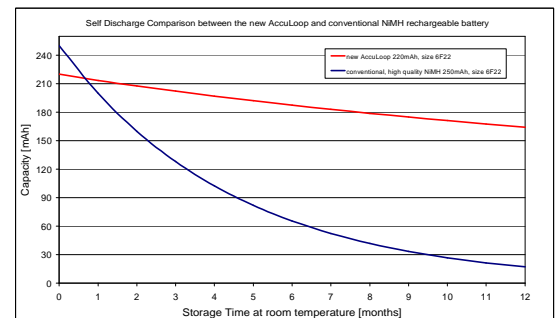
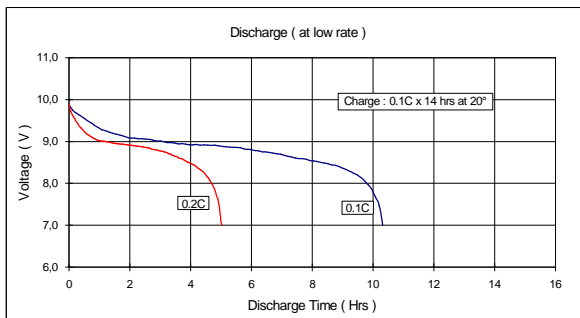
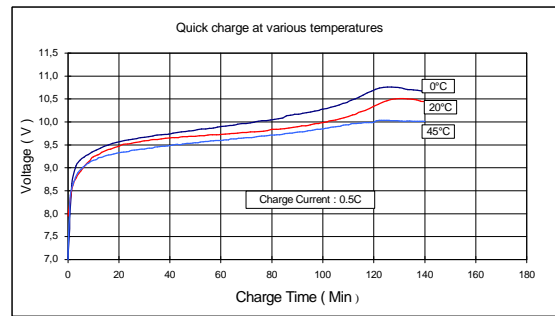


Size		6F22 E-Block	
Nominal voltage		8.4V (9V)	
Capacity (mAh)	Maximum	C/5	C/2
	Typical	220	200
Width		26.2 ± 0.5 mm 1.031 ± 0.02 inch	
Thickness		16.5 ± 0.5 mm 0.649 ± 0.02 inch	
Height		48.0 ± 0.5 mm 1.890 ± 0.02 inch	
Weight		35 ± 2g	
Approx. Internal impedance at 1000Hz at charged state.		420 mΩ	
Charge Start voltage 7.0V	Standard	0.1C x 14 Hrs	
	Quick: with control	0.2C x 6 ~6.5 Hrs	
	Rapid: with control (-ê V, 0 to 5mV/cell)	0.5C x 2~2.2 Hrs	
Discharge	Standard	0.2C	
	High Rate	2.0C	
Ambient temperature	Charge	Standard	0°C to 45°C
		Quick	10°C to 40°C
	Discharge		-20°C to 60°C
	Storage		-20°C to 40°C Less than three months -20°C to 30°C Less than one year

Typical Characteristics

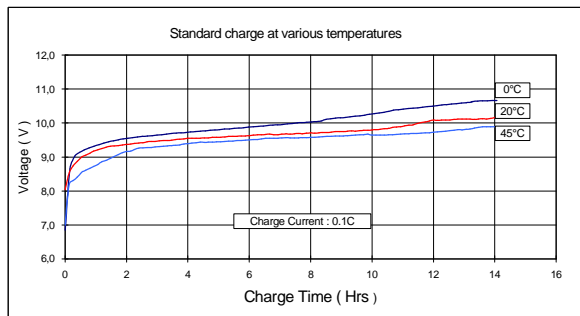

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Data in this specification is subject to change without notice.