
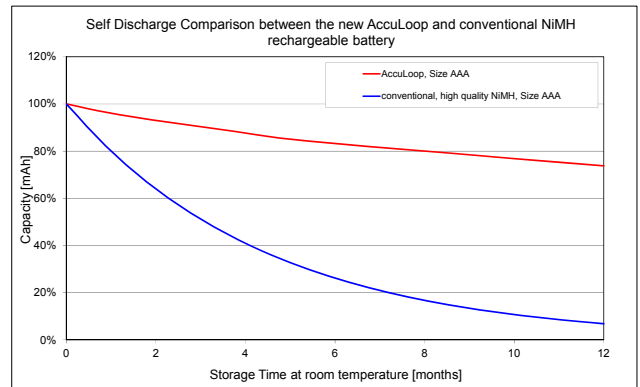
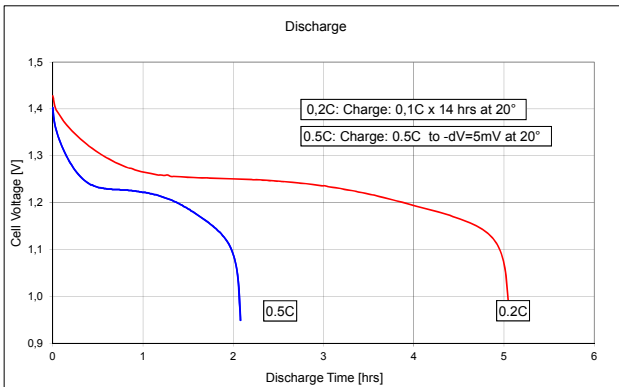
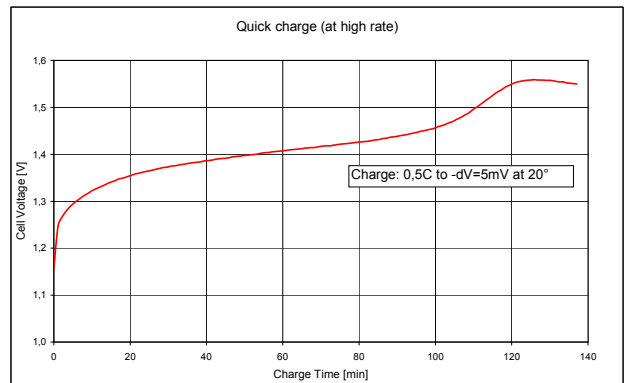


Nominal voltage		1.2V	
Capacity	Maximum (rated)	C/5	C
	Typical	1100mAh	950mAh
Diameter	D	10.20 ± 0.3 mm 0.40 ± 0.01 inch	
	d	3.7 ± 0.2 mm 0.15 ± 0.01 inch	
Height	H	44.0 ± 0.5 mm 1.68 ± 0.02 inch	
	h	0.8 ± 0.2 mm 0.05 ± 0.01 inch	
Weight		approx. 13.3g	
Approx. internal impedance at 1000Hz at charged state.		≤35mΩ	
Charge starting at 1.0V	Standard	0.1C x 14 hrs	
	Quick	0.25C x 4.4 hrs or -ΔV=5mV or 48°C	
	Rapid	0.50C x 2.2 hrs or -ΔV=5mV or 48°C	
Discharge to 1.0V	Standard	0.2C	
	High Rate	1.0C (continuous) 2.0C (momentary)	
Ambient temperature	Charge	0°C to +45°C	
	Discharge	-20°C to +55°C	
	Storage	-20°C to +40°C Less than three months -20°C to +35°C Less than one year	
Charge state before shipment (Ready to use): ≥70%			

Typical Characteristics

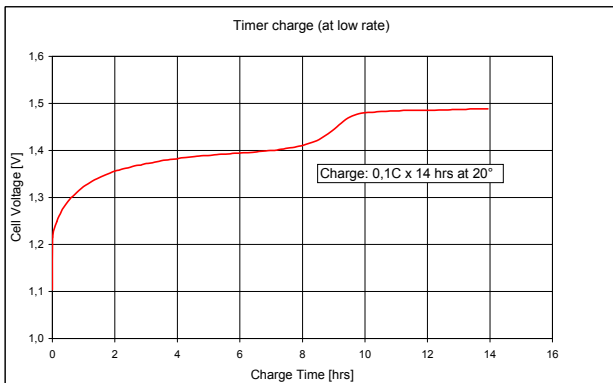

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Data in this specification is subject to change without notice. Rev. 03/2014.

Note: Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. Die Informationen und Inhalte in diesem Datenblatt dienen nur als Referenz Zweck. Sie stellen keine Gewährleistungen oder Zusicherungen dar, und können jederzeit ohne vorherige Ankündigung geändert werden.