

APCH-2FC07

Specifications

Connection Housing for 2 CONTACTS with guiding APCH-2FC07



HOUSING for 2 CONTACTS

With high mechanical strength and cable strain relief.

Suitable for 2 pcs. Powerpole® connectors PP 15/30/45 and for different configurations

Ideal for cable mounting

Contents: 2 plastic shells, 1 guiding part, 2 fixing screws and 1 Cable gland grommet, without Powerpole® connector, unassembled.

Materials: PC / ABS (polycarbonate / acrylonitrile butadiene styrene) is a blend of PC and ABS, combined with great mechanical properties of PC such as impact resistance and heat resistance. Compliant with RoHS

- High impact strength at low temperatures
- Heat resistance
- High strength
- Low shrinkage and high dimensional stability

Physical

Shell:

Material:	PC / ABS (polycarbonate / acrylonitrile butadiene styrene)
Flammability:	UL 94V-0
Colour:	Dark Grey
Cable gland:	Rubber

Screw: (2) M2.5-10 Screws with countersunk Steel hardness with galvanic coatings

Environmental

Temperature Rating: -25°C to +85°C

Ordering Information

APCH-2FC07 Contact Quantity 2 = 2contacts

Connector Type: F = FemaleM= Male

Mounting type: C07= Cable assembly, diameter 7mm C08= Cable assembly, diameter 8.5mm MPI= Mounting on 25 mm pipe MPS=Mounting on plane surface



Compliant

Konform


NOTE: Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 1/3 Bas. 11/17





APCH-2FC07

Specifications

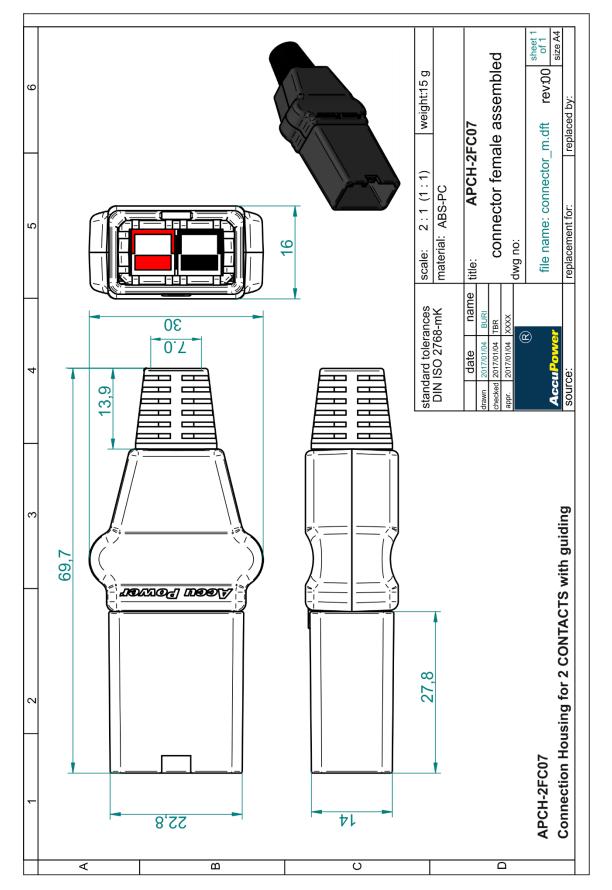


NOTE: Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 2/3 Bas. 11/17



APCH-2FC07

Specifications

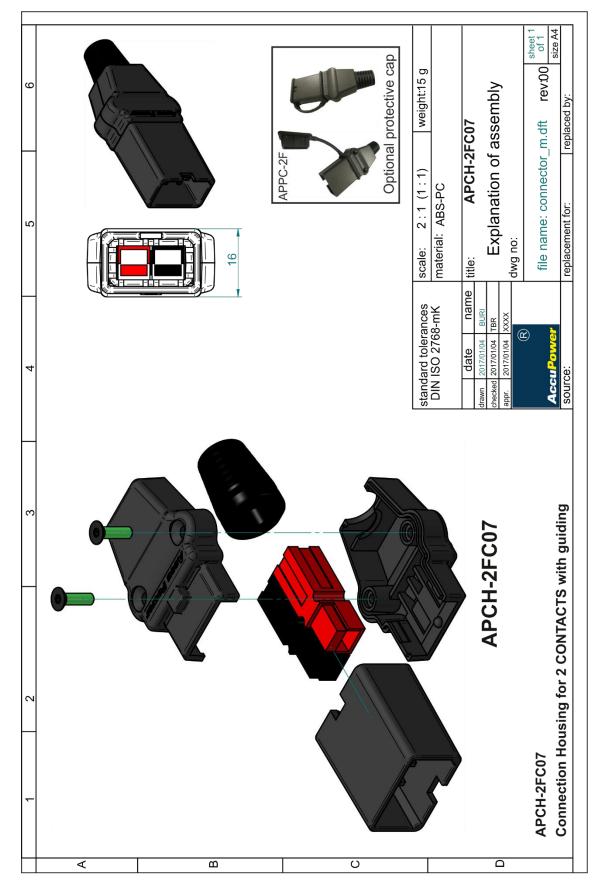

NOTE: Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 3/3 Bas. 11/17