


Specifications

# Connection Housing for 2 CONTACTS with guiding APCH-2FC08

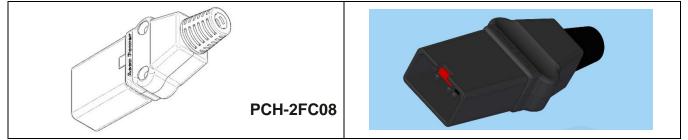

### **HOUSING for 2 CONTACTS**

With high mechanical strength and cable strain relief.

Suitable for 2 pcs. Powerpole® connectors PP 15/30/45 and for different configurations

Ideal for cable mounting



Contents: 2 plastic shells, 1 guiding part, 2 fixing screws and 1 Cable gland grommet, without Powerpole® connector, unassembled.

Materials: PC / ABS (polycarbonate / acrylonitrile butadiene styrene) is a blend of PC and ABS, combined with great mechanical properties of PC such as impact resistance and heat resistance. Compliant with RoHS

- · High impact strength at low temperatures
- Heat resistance
- High strength
- · Low shrinkage and high dimensional stability



Shell:

Material:	PC / ABS (polycarbonate / acrylonitrile butadiene styrene)
Flammability:	UL 94V-0
Colour:	Dark Grey
Cable gland:	Rubber

Screw: (2) M2.5-10 Screws with countersunk Steel hardness with galvanic coatings

Environmental

Temperature Rating: -25°C to +85°C

#### **Ordering Information**

APCH-<u>2FC08</u>

Contact Quantity: 2 = 2contacts F = Female M= Male

Mounting type: C07= Cable assembly, diameter 7mm C08= Cable assembly, diameter 8.4mm MPI= Mounting on 25 mm pipe MPS=Mounting on plane surface



Compliant

Konform


**NOTE:** Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 1/3 Bas. 01/17





### **APCH-2FC08**

## **Specifications**

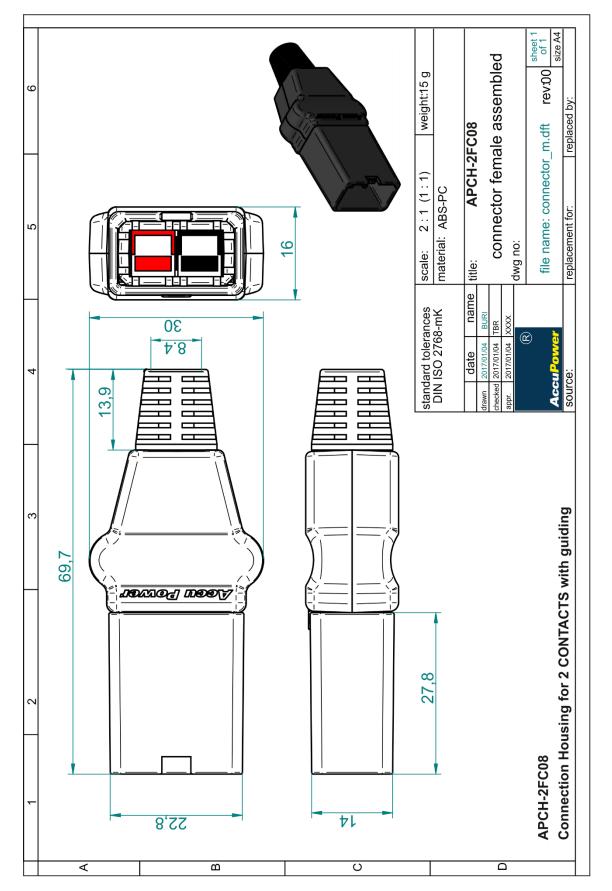


**NOTE:** Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 2/3 Bas. 01/17



## APCH-2FC08

## **Specifications**

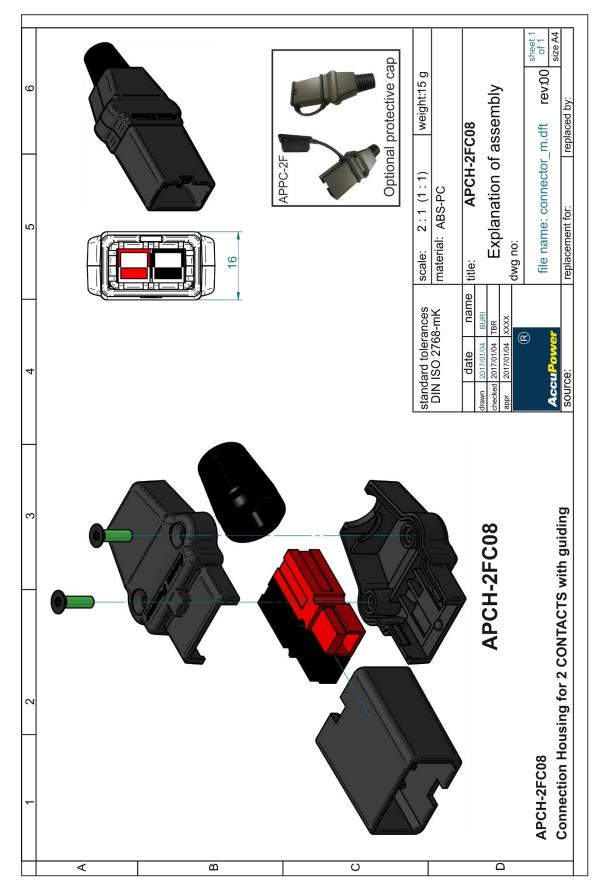

**NOTE:** Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 3/3 Bas. 01/17