

# Connection Housing for 2 CONTACTS for Mounting on 25mm pipe: APCH-2FMPI



## **HOUSING for 2 CONTACTS**

With high mechanical strength and cable strain relief.

Suitable for 2 pcs. Powerpole® connectors PP 15/30/45. Ideal for Mounting on 25 mm pipe.

Contents: 4 pcs. plastic parts, 2 fixing screws, without Powerpole® connector, unassembled.

Materials: PC / ABS (polycarbonate / acrylonitrile butadiene styrene) is a blend of PC and ABS, combined with great mechanical properties of PC such as impact resistance and heat resistance. Compliant with RoHS

- High impact strength at low temperatures
- Heat resistance
- High strength
- Low shrinkage and high dimensional stability









## Physical

plastic parts:

 Material:
 PC / ABS (polycarbonate / acrylonitrile butadiene styrene)

 Flammability:
 UL 94V-0

 Data
 Data

Colour: Dark Grey

Screw: (2) M4-8 Screws with countersunk Steel hardness with galvanic coatings

#### Environmental

Temperature Rating: -25°C to +85°C


## **Ordering Information**

APCH-<u>2FMPI</u>

Contact Quantity: 2 = 2contacts F = Female M= Male

Mounting type: C07= Cable assembly, diameter 7mm C08= Cable, diameter 8.4mm MPI= Mounting on 25 mm pipe MPS=Mounting on plane surface



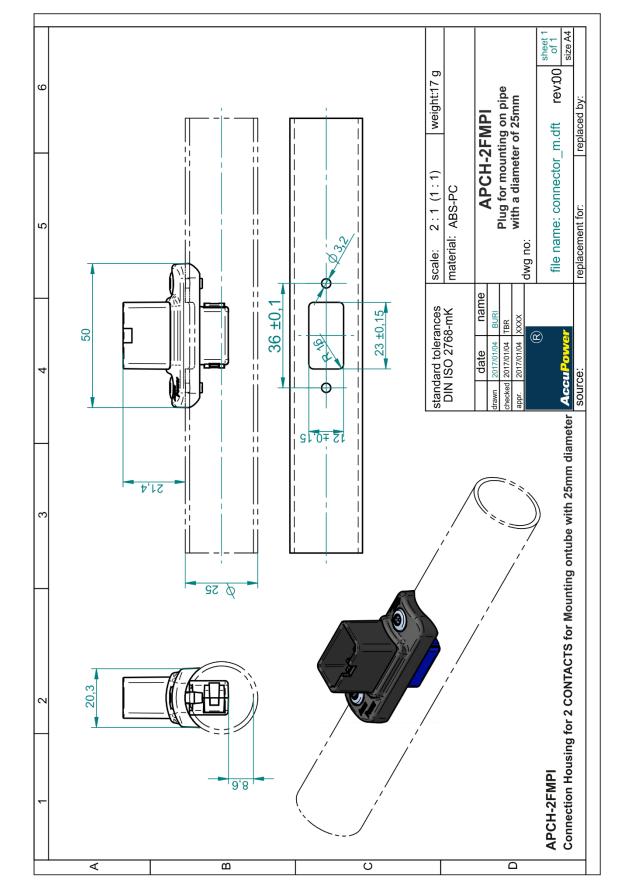


**NOTE:** Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 2/3 Bas. 11/17



## **APCH-2FMPI**

# **Specifications**

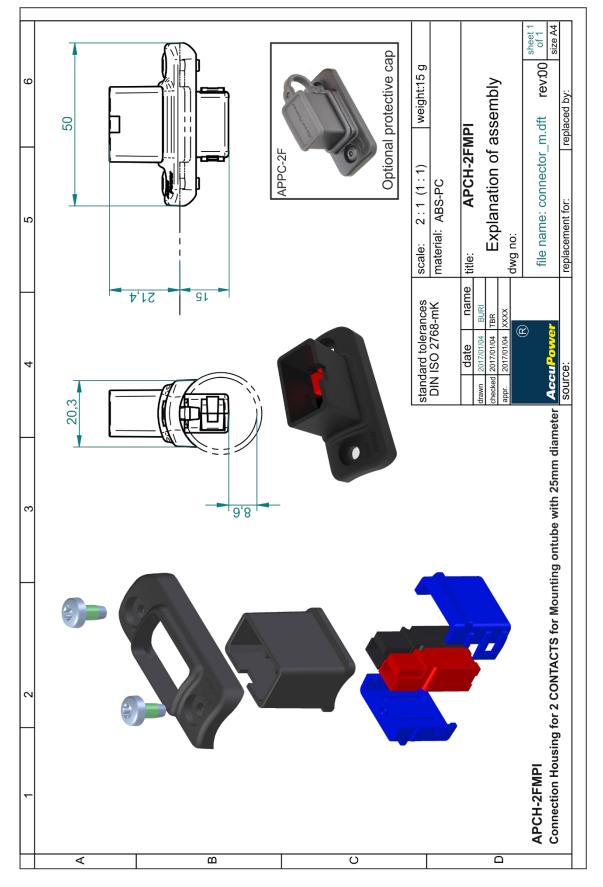

**NOTE:** Information and contents in this datasheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. 3/3 Bas. 11/17