


Specifications Ready to use



Size			6F22 E-Block	
Nominal voltage			8.4V (9V)	
Tronmar voltage			` ,	
Capacity (mAh)			C/5	C/2
	Maximum		220	200
	Typical		210	190
Width			26.2 ± 0.5 mm	
			1.031 ±0.02 inch	
Thickness			16.5 ± 0.5 mm	
			0.649 ±0.02 inch	
Height			48.0 ±0.5 mm	
			1.890 ±0.02 inch	
Weight			35 ±2g	
Approx. Internal impedance at 1000Hz			420 mΩ	
at charged state.				
Charge Start voltage 7.0V	Standard		0.1C x 14 Hrs	
	Quick: with control		0.2C x 6 ~6.5 Hrs	
	Rapid: with control		0.5C x 2~2.2 Hrs	
	(- ê V, 0 to 5mV/cell)			
Discharge	Standard		0.2C	
	High Rate		2.0C	
	Charge	Standard	0°C to 45°C	
		Quick	10°C to 4	10°C
Ambient	Discharge		-20°C to 60°C	
temperature	Storage		-20°C to 40°C	
			Less than three months	
			-20°C to 30°C	
			Less than one year	

Typical Characteristics

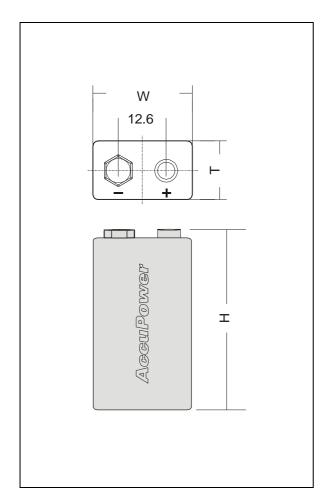